

# FACE HAULER GFH125 D

## Specifications

### Capacities

Payload (Nominal with Hungry Boards)		
Other Capacities Available	15 m <sup>3</sup>	19.6 yd <sup>3</sup>
Payload (Maximum Weight all Material)	20 000 kg	44,092 lb
Consult Caterpillar for Weight Over	15 000 kg	33,069 lb

### Weight

Unladen with Full Tanks	25 000 kg	55,115 lb
Laden with 15T Load	42 000 kg	92,594 lb
Type	Diesel, Turbocharged, 4 Cycle	
Cooling System	Water Based Radiator	
Cooling Fan	Hydraulic Driven Fan	
Engine Make/Model	Cat 3126	
Displacement	7.2 L	439.3 in <sup>3</sup>
Maximum Power	172 kW (230 hp) @ 2,200 rpm	
Maximum Torque	720 N·m (531 lb-ft) @ 1,400 rpm	

### Engine Speeds

Low Idle	800 rpm
High Idle	2,700 rpm
Governed	2,600 rpm

### Fuel Consumption

At Full Power	37.5 L/hr	9.9 gal/hr
Average Mine Duty	8-30 L/hr	2.1-7.9 gal/hr

### Start System

Starter Motor Type	Air Turbine Type
--------------------	------------------

### Intake Air Cleaner

Type/Make	Dry Dual Element/Caterpillar
Intake Flame Trap	Spiral Wound Type

### Transmission

Type	Power Shift with Forward/Reverse Modulation
Speeds, Forward and Reverse	4

### Torque Converter

Type	Mounted in Transmission, Single Element
------	---

### Axles

Axles Standard	
Type	Outboard Planetary
Front Axle	Fixed
Rear Axle	Fixed
Differential Type	Bevel Gear and Pinion

### Wheels

Make/Model	5 Piece (Heavy Duty)
------------	----------------------

### Tires – Standard

Type	XKA Tires
Size	17.5 × 25
Ply Rating	Radial
Inflation Media	Air
Inflation Pressure	800 kPa      116 psi

### Articulation

Bearing Type	Pin and Spherical Bearing (Top and Bottom) Fully Sealed
Degrees of Turn Either Side	± 42 Degrees

## Oscillation

Type	Center Articulation Bearing
Bearing Type	Ball Type Slewing Roller Bearing
Degrees Up and Down from Horizontal	± 30°

## Seating (Driver)

Type	Cross-Seated
Suspension	Adjust Spring/ Shock Absorber

## Canopy

Type	Adjustable Protective Device MDG1
------	--------------------------------------

## Electrical System

Type	Approved Flameproof
Voltage	12V
Polarity	Negative Ground
Shutdown System	Electronic Intrinsically Safe Approved

## Lights

Number/Location	2 Front, 2 Rear
Type	High Performance Approved Flameproof

## Alternator

Drive	Hydraulic
Type	Approved Flameproof

## Pneumatic System

Compressor Type	Piston Engine Gear Driven	
Air Flow	0.340 m <sup>3</sup> /min (12 ft <sup>3</sup> /min) @ 1,500 rpm	
Governed Pressure	800 kPa	116 psi
Relief Pressure	830 kPa	120 psi
Air Receiver Volume	80 L	2.8 ft <sup>3</sup>

## Service Capacities

Hydraulic Tank	300 L	78.3 gal
Fuel Tank	300 L	78.3 gal
Transmission/Converter Oil	80 L	21 gal
Engine Crankcase Oil	22 L	5.8 gal
Engine Cooling System Water	72 L	19.0 gal
Axle Oil (Each)	60 L	15.8 gal


## Exhaust Conditioner

Type	Flameproof Wet
Make	Caterpillar
Exhaust Filter	Replaceable Element Except China
Exhaust Flame Trap Aftertreatment	Replaceable China and RSA Catalytic Exhaust Purifier

## Vehicle Speeds (Unladen) 17.5 × 25 Tires

1st Gear	3.8 km/h	2.3 mph
2nd Gear	7.8 km/h	4.8 mph
3rd Gear	13.6 km/h	8.5 mph
4th Gear	23.4 km/h	14.5 mph

Speed Grade FH125 D Loaded 15 T

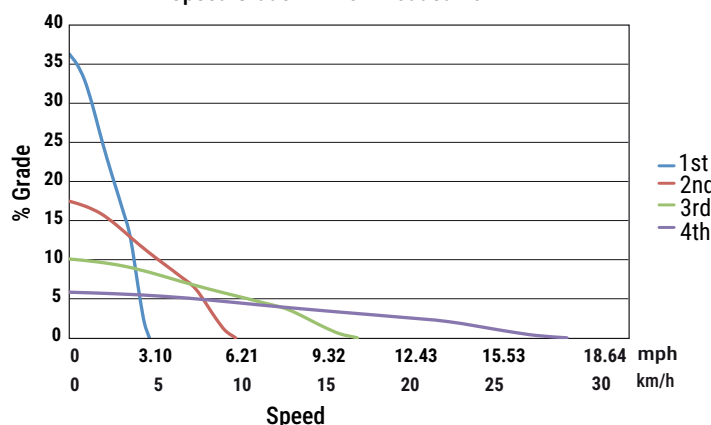


## Maximum Tractive Effort 17.5 × 25 Tires



1st Gear	210 kN	47,209 lb
----------	--------	-----------

## Grade Ability

Front to Rear	1:4
Side to Side (Empty)	1:4

TE V Speed FH125 D Loaded 15 T

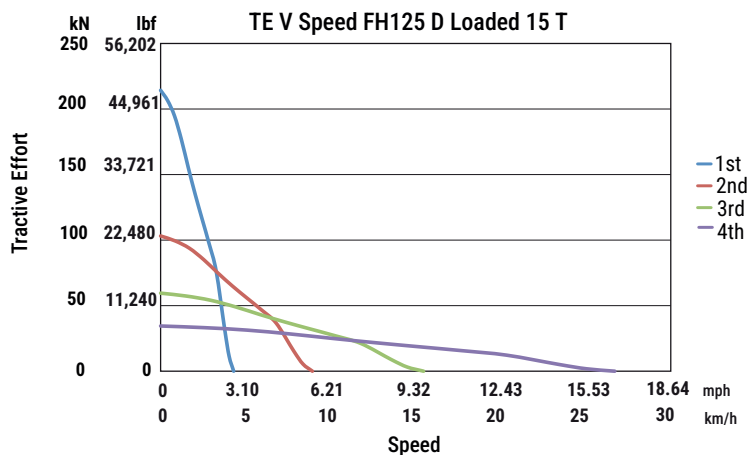

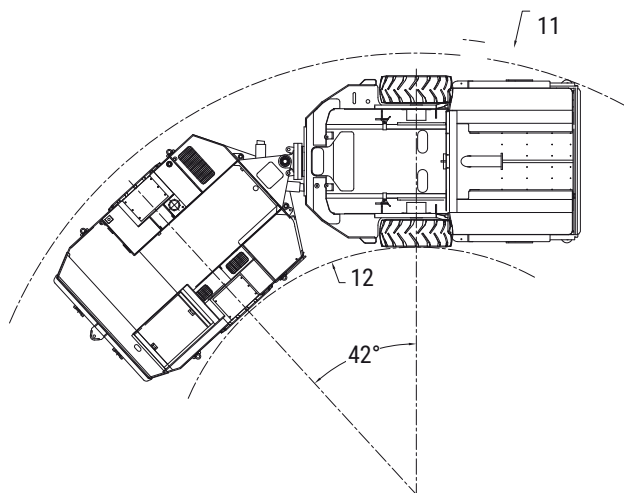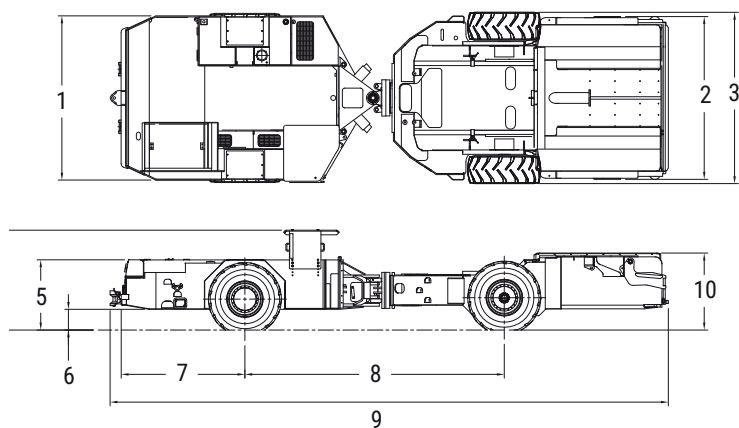

### Dimensions (All dimensions are approximate.)

1. Width – Cab	3330 mm	131.1 in
2. Width – Hauler	3305 mm	130.1 in
3. Width – Over Wheels	3475 mm	136.8 in
4. Height – Top of ROPS		
5. Low Canopy Mount	1900 mm	74.8 in
6. Mid Canopy Mount	1962 mm	77.2 in
7. High Canopy Mount	2025 mm	79.7 in
8. Height – Top of Covers	1425 mm	56.1 in
9. Height – Ground Clearance	420 mm	16.5 in
10. Length – Rear Axle to Bumper	2510 mm	98.8 in
11. Length – Wheel Base	5263 mm	207.2 in
12. Length – Overall	11350 mm	446.8 in
13. Height – Top of Hauler	1560 mm	61.5 in
14. Outer Radius – Rear Frame	8960 mm	352.8 in
15. Inner Radius	5020 mm	197.6 in

---

## OPTIONAL EQUIPMENT

---

- |                                 |   |  |
|---------------------------------|---|--|
| ■ Filled Tires – Insert or Foam | ■ Flameproof Reversing Camera and Monitor | ■ Trailer Side Hungry Board Arrangements |
| ■ Fire Suppression System       | ■ 20.5 × 25 Tires                         | ■ Trailer Tail Gate                      |
| ■ Auto Lubrication System       | ■ Non Flameproof Versions                 | ■ Others Available on Request            |

Contact your local Caterpillar representative for further information on this diesel powered product or any product in the Development and Diesel product line. If you have a specific job task requirement or a product that is not listed let Caterpillar assist by developing a solution for and with you.

### India

Gainwell Engineering Private Limited  
Godrej Genesis Technology Park  
Unit 401, 402, 403, Plot X1  
Block EP & GP, Salt Lake  
Sector V, Kolkata – 700091, India  
Email : [info@gainwellengineering.com](mailto:info@gainwellengineering.com)

### Singapore

Gainwell Engineering Global PTE. Limited  
39 Robinson Road  
#15-01, Robinson Point  
Singapore 068911  
Phone : +65 98706685  
Email : [finance@enl.com.sg](mailto:finance@enl.com.sg)

### Australia

Gainwell Engineering Pacific Pty Limited  
135 Bulls Garden Road  
Gateshead, NSW 2290  
+61 0240721130  
Phone : (02) 4072 1130  
Email : [cs@gainwellengineering.com](mailto:cs@gainwellengineering.com)

### USA

Gainwell Engineering Inc.  
198 Baughan Road  
HICO, West Virginia, 25854  
United States of America  
Phone: 1-304-658-2100  
Email: [inquiries@gainwellengineering.com](mailto:inquiries@gainwellengineering.com)